


OF TIMBER QUALITY PRODUCTS

**HOW TO MEASURE ARCHED ARCHITRAVES**

Store: \_\_\_\_\_  
 Contact: \_\_\_\_\_

Phone No: (0\_\_\_) \_\_\_\_\_  
 Fax No. (0\_\_\_) \_\_\_\_\_

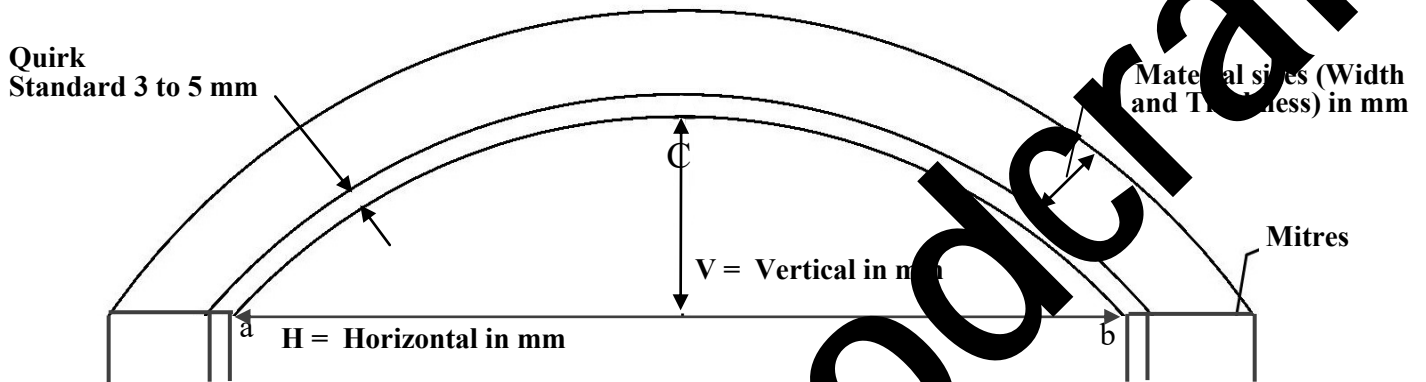

- STEP 1:** Measure **H** in mm: horizontal internal window width.
- STEP 2:** Measure **V** in mm: Vertical internal window height from the **centre** of the horizontal line between points (a) and (b) as shown in diagram above
- STEP 3:** Add set back for architrave from inside edge of window frame (Quirk). Standard Quirk = 3 to 5 mm. See diagram above
- STEP 4:** To match your architrave profile/size of material/type of timber or MDF, please provide 100 mm sample. It can be mailed.
- STEP 5:** Supply code of profile available
- STEP 6:** If your window head is not the radius, please supply template.

**NOTE:** We will supply architrave longer than your measurements to allow you to cut the corner mitres

**EXAMPLE:** How many windows the same \_\_\_\_\_ Generally 3-5 mm

CODE: \_\_\_\_\_ Quantity: 1 Horizontal: 1810 mm Vertical: 253 mm + Quirk: 3 mm

MATERIAL: Size: 90 x 42 mm  MDF  LOSP T / PINE or OTHER \_\_\_\_\_

**TO ORDER, FILL IN BELOW**

CODE: \_\_\_\_\_ Quantity: \_\_\_\_\_ Horizontal: \_\_\_\_\_ mm Vertical: \_\_\_\_\_ mm + Quirk: \_\_\_\_\_ mm

MATERIAL: Size: \_\_\_\_\_ x \_\_\_\_\_ mm  MDF  LOSP T / PINE or OTHER \_\_\_\_\_

Please note that it is your responsibility to check all sizes are correct.